


General description

The **perforated base hangers** are designed to fix efficiently insulation on concrete and any other rough and smooth surfaces.

They can be fixed by gluing, riveting, screwing or even nailing.

It consists of a pin, firmly crimped on a perforated base.


Locking washers supplied in each box.

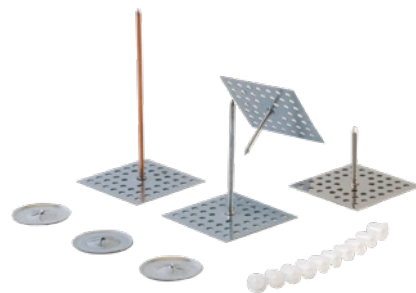

Technical specification

		GSP	GSAP-ALU	GSP-BGS	GSP-SS
Base	Material	Galvanized steel			Stainless steel 304 (316 on request)
	Dimensions	50 x 50 mm (2" x 2")			
	Thickness	0,4 mm (28 ga.)			
Shank	Material	Up to 63 mm length (2-1/2") galvanized steel	Aluminium	Stainless steel 304 (Stainless steel 316 on request)	
		From 76 mm length (3") copper plated steel			
	Diameter	2,7 mm (12 ga.)			
	Lenghts	19 to 400 mm (3/4" to 16")	45 to 165 mm (1-3/4" to 6-1/2")	25 to 400 mm (1" to 16")	


		CL-27-30	CL-27-40	CL-24-32	CL-27-30-SS	CL-27-40-SS
Locking washer	Material	Galvanized spring steel		Galvanized spring steel	Stainless steel 304 spring type	
	Diameter	30 mm (1-3/16") supplied as standard	38 mm (1-1/2") supplied on request	32 x 30 mm (1-1/4 x 1-3/16")	30 mm (1-3/16") supplied as standard	38 mm (1-1/2") supplied on request
	Thickness	0,35 mm (28 ga.)		0,4 mm (28 ga.)	0,33 mm (29 ga.)	
	Edges	Beveled				




Storage

Store in a dry place

Application




Apply adequate adhesive to the underside of the hanger, or use rivets or screws.




Position the hanger and press until the adhesive seeps through perforations.

Do not use sealant.



As soon as the strength of adherence is sufficient, impale the insulation on the hangers. Please consult your glue supplier to know about the drying time.



Secure the insulation with CL locking washers, without compressing it.

If necessary cover the pin with a protective cap.