


General description


The **Tabbed duct access doors** are available in variety of sizes to suit all requirements. All duct access doors are double-skin construction using Z275 galvanized steel enclosing 25mm fibreglass insulation. Radius tabs on the ductwork access door frame reduce the likelihood of hand injury.

- Tabbed doors come with a fully Z275G galvanized steel coating
- Insulation : High density (45Kg/m³) thermal conductivity: 25 °C - 0.035 and 75 °C - 0.044, (GB/T10294-2008).
- High density polyethylene foam seal fixed on the edges of the inside of the outer frame.
- Camlock that ensures sealing by compression.

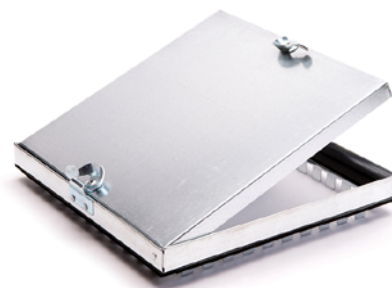

Technical specification

TAB DOOR	Material	Galvanized steel
	Frame thickness	0,9 mm
SEAL	Material	High density Polyethylene (PE)
INSULATION	Material	Glass wool type RWA 45
	Density	45 Kg / m ³
	Thickness	25 mm
	Fire classification	Non combustible classification A1
	Heat Conductivity	0,035 w / mk
LOCKS	Camlocks	

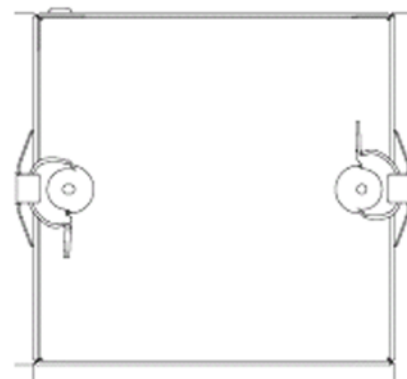

Standard sizes available

150 x 150 mm	200 x 125 mm	250 x 250 mm	300 x 150 mm	400 x 200 mm	450 x 300 mm	500 x 500 mm	600 x 300 mm
	200 x 200 mm		300 x 200 mm	400 x 300 mm	450 x 450 mm		600 x 400 mm
			300 x 300 mm	400 x 400 mm			600 x 450 mm
							600 x 600 mm

Other sizes available on demand

Application

Application is quick and easy. After cutting a hole of more or less 30-32 mm shorter than the size of the used door, you just need to push down the flaps. Afterwards, you need to place the door inside of its frame and tighten the fasteners.