

General description

Soft protective profile rubber. Depth provided with an adhesive strip for a better grip on duct profile. Designed for metal sheet of 0.6 to 1.5mm thickness. Fast assembly and allows to reach «C» class airtightness. Available pre-cut for each size of access doors or in roll of 100m.

- Designed for sheet metal 0.6 to 1.5 mm thick
- Quick and easy assembly without tools
- Allows access doors to reach the airtightness class «C»





Technical specification

Material	EPDM
Shore	20 / 25 Sh A
Color	Black
Adhesive	Rubber
Temperature of use	- 30°C / +100°C

Alogen and silicone free

Application

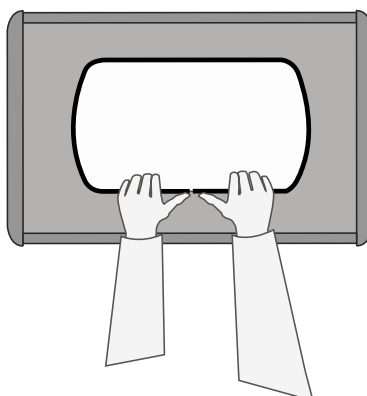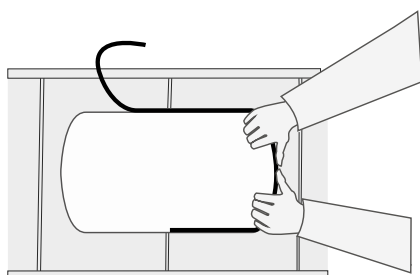



DE 633X206
VE 305/3/FR
Page 5/5



DE 633X206
VE 305/3/FR
Page 4/5

