

General description

Perforated bands are designed for suspension of ventilation ducts, pipes and other equipments. Easy to fold and cut, GPB is a quick and competitive way for suspension.

They can be used with M6, M8, M10 bolts, screws and rivets.


- **Material** : galvanized steel



Technical specification


FOR 6 MM DIAMETER THREADED ROD

	Width (w)	Thickness	Max. recommended load
GPB - 176 OV	17 mm	0,60 mm	125 Kg

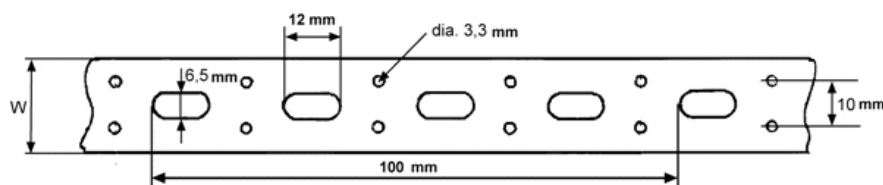

FOR 8 MM DIAMETER THREADED ROD

	Width (w)	Thickness	Max. recommended load
GPB - 176 RD	17 mm	0,60 mm	105 Kg
GPB - 206 RD	20 mm	0,60 mm	140 Kg
GPB - 208 RD	20 mm	0,75 mm	170 Kg
GPB - 258 RD	25 mm	0,75 mm	250 Kg

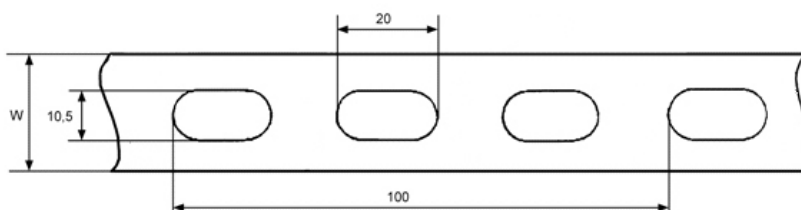

FOR 10 MM DIAMETER THREADED ROD

	Width (w)	Thickness	Max. recommended load
GPB K - 259 OV	25 mm	0,90 mm	260 Kg

