TECHNICAL DATA SHEET (1/2)

T - 7220 _ E-SVF RAL 9010 / 9016 / 9005

General description


- Exhaust steel air valve
- Adjustable inner core
- 50 mm deep galvanized steel mounting frame
- Standard available colour : White RAL9010 (Matt)
  and RAL 9016 (Shiny)
  and black 9005 with 30% gloss
- Available diameters : 80-250 mm




E-Black-SVF


E-SVF






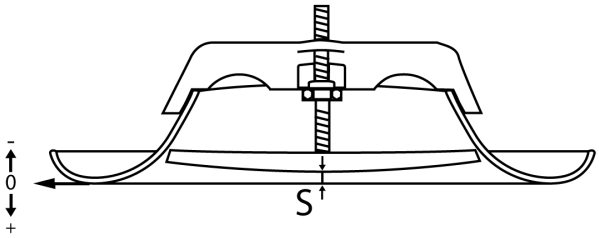

Technical specification

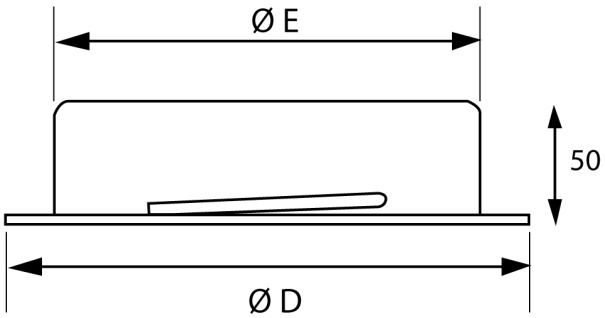

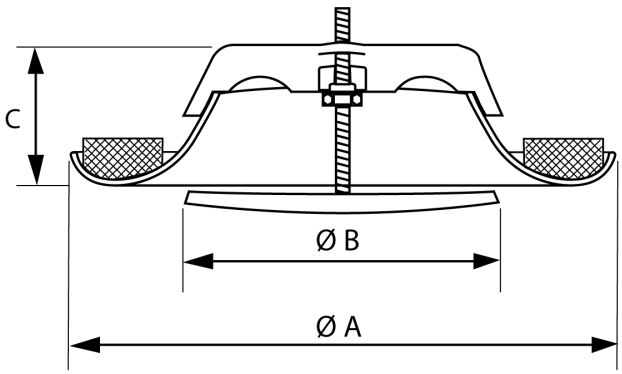

	E-SVF 9010	E-SVF 9016	E-BLACK-SVF 9005	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
80	√	√		116	80	38	105	79
100	√	√	√	140	93	38	125	99
125	√	√	√	166	112	45	150	124
150	√	√	√	203	137	50	175	149
160	√	√	√	210	148	50	186	159
200	√	√	√	250	195	56	225	199
250	√	√		305	215	75	275	248

Tolerance : +/- 3 mm except Dia E: Tolerance: +/- 1 mm

Information contained herein is based on careful tests and experience. It reflects our knowledge and is for guidance purpose only. It is given in good faith and user should ensure that the product is fit for purpose before any application. The quoted values are average and should not be taken as maximum or minimum values for specific purposes. Manufacturer and distributor are not responsible for any non-recommended use or consequential damage.

TECHNICAL DATA SHEET (2/2)

T - 7220 _ E-SVF RAL 9010 / 9016 / 9005

Sound attenuation and airflow characteristics

according to «S» opening

Diameters	Airflow (m3/h)	Airflow (l/s)	Opening «s» (mm)	Delta Pt (Pa)	dBA
Ø 80 MM	40	11	3	35	22
			0	80	31
	60	17	9	40	30
			6	55	32
			3	100	38
Ø 100 MM	80	22.2	8	35	25
			6	55	30
			4	85	34
	100	27.8	10	58	33
			8	72	36
	120	33.3	10	68	36
Ø 125 MM	100	27.8	6	35	23
			3	50	26
			0	90	34
	140	39	15	28	25
			12	34	27
			9	45	28
			6	65	33
			3	100	36
	180	50	15	45	32
			12	50	33
			9	70	35
Ø 150/160 MM	160	41	10	25	20
			5	42	23
			2	70	30
			0	90	35
	200	56	10	40	24
			5	68	30
			2	95	35
	250	69	15	38	26
			10	59	30
			5	95	36
Ø 200 MM	300	83	20	25	25
			15	35	27
			12	50	30
			9	68	32
			6	100	35
	350	97	20	35	30
			15	55	33
			12	70	35
	400	111	20	50	34
			15	65	36

Information contained herein is based on careful tests and experience. It reflects our knowledge and is for guidance purpose only. It is given in good faith and user should ensure that the product is fit for purpose before any application. The quoted values are average and should not be taken as maximum or minimum values for specific purposes. Manufacturer and distributor are not responsible for any non-recommended use or consequential damage.