

General description

The **Rubber Mounts AG35 and AG45** are rubber-metal vibration absorbers, especially indicated for elastic support of airconditioning units and small machines. They protect the environment against the transmission of vibration, impacts and structural noises. They are easy to install and economical.



The Rubber Mounts AG35 and AG 45 are supplied in packs of 4 called **Instalpack**. They include :

- 4 rubber mounts - AG35 or AG45
- 8 nuts M8 zinc coated
- 8 washers M8 zinc coated



Technical specification

Manufactured in NR (natural rubber) 55°Sh.A

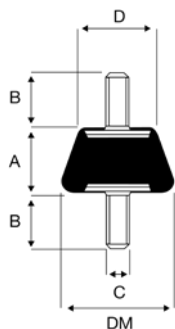


AG 35/45

	A	B	C	D	DM
AG 35	19 mm / 3/4"	20mm / 0,78"	M8	25 mm / 0,98"	40 mm / 1,57"
AG 45	26 mm / 1,02"	20 mm / 0,78"	M8	31 mm / 1,22"	44 mm / 1,73"


	AG 35				AG 45			
Max. deflection/mm	4				4			
Deflexion (mm)	1	2	3	4	1	2	3	4
Load (kg)	16	32	48	64	19	42	69	90
Natural frequency Hz	19,4	13,7	11,2	9,7	18,9	13,5	11,2	9,8

Assembly

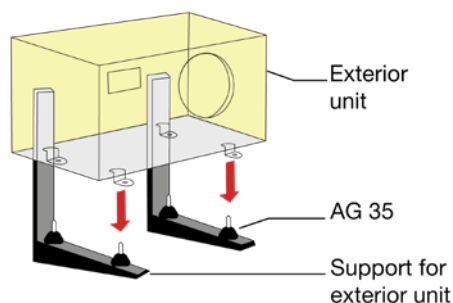

- Attach the support to the wall
- Fasten the vibration absorbers to the support
- Mount the unit onto the vibration absorbers
- Attatch the vibration absorbers onto the holes in the unit

Application



Exterior air conditioning units



Motors and pumps