



General description


The Antivibration rubber mats and pads are made in Natural Rubber.
They range from 45 to 60° Sh. A and can withstand loads from 50 to 12 000 kg.
Ideal for insulating all kinds of machinery with high frequencies (above 1 200 rpm).
Operating temperature: -20 ° C / + 70 ° C.
Many sizes available.

Technical specification


									
	CHOC ISOL (Antivibration Waffle Pads)		MIT (grooved mattress)			PA (Square pads)			
	CHOC ISOL	4-CHOC ISOL	MIT 208	MIT 310	MIT 412	PA 7030	PA 8035	PA 10030	PA 10060
Material	NR	NR	NR	NR	NR	NR	NR	NR	NR
Hardness (Sh. A)(±5)	45°	45°	55°	55°	55°	60°	60°	60°	60°
Min. load (kg)	2800	300	200	250	500	50	100	75	200
Max. load (kg)	12000	1300	1000	2000	3500	300	600	700	1200
Nat. Frequency Fm 3 mm	14,5 Hz	14,5 Hz	13,5 Hz	22,9 Hz	25,5 Hz	14,5 Hz	14,5 Hz	15 Hz	15 Hz
Nat. Frequency Fm 7 mm	9Hz	9Hz	-	12,6 Hz	13,8 Hz	9 Hz	9 Hz	9 Hz	9 Hz
Length (mm)	457	105	225	280	380	68	78	98	98
Width (mm)	457	105	225	280	380	68	78	98	98
Height (mm)	19	19	8	10	12	28	33	28	56

Assembly


Chocisol & MIT can be cut into smaller pieces

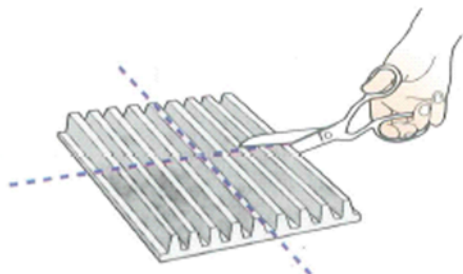

Application

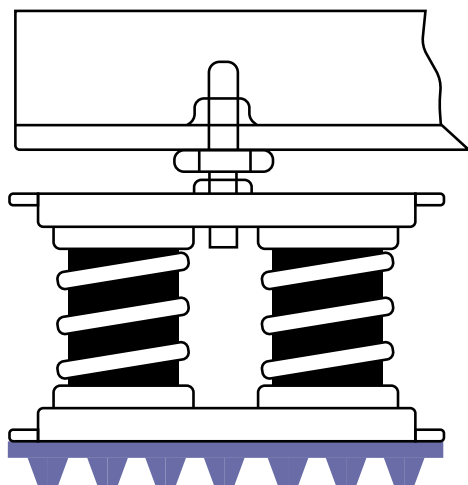

**Isolation reinforcement in
critical areas**

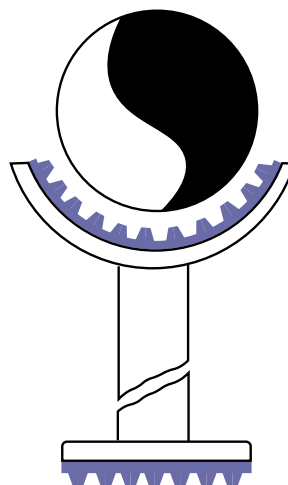

Floor piping