

General description

The **Rubber Mounts SG** are rubber-metal vibration absorbers, especially indicated for supporting machinery elastically, protecting the environment against the transmission of vibrations, impacts and structural noise.

They provide excellent insulation at medium and high frequencies (1500 rpm and above). It distributes the stresses better and thanks to the engraving of the base, it promotes grip and prevent the machine from pivoting.

The **Rubber Mounts** are supplied individually or in pack of 4 called **Airpack**.

Airpack 40, 60 and 70 include : 4 rubber mounts, 8 nuts zinc coated, 4 washers zinc coated.


SG 80 and SG90 are supplied in individual pack: 1 rubber piece, 1 threaded rod, 2 nuts and 1 washer.




Technical specification

Manufactured in NR (Natural Rubber) 55° Sh A.


	SG 40	SG 60	SG 70	SG 80	SG 90
A (mm)	17	20	22	26	35
B (mm)	45	60	75	80	100
C	M8	M10	M10	M12	M16
D (mm)	48	57	57	74	108
Min. load (kg)	8	25	45	80	150
Max. load (kg)	70	100	150	300	800
Natural frequency Fn 3mm (Hz)	21	21	21	21	21
Natural frequency Fn 7mm (Hz)	12	12	12	12	12

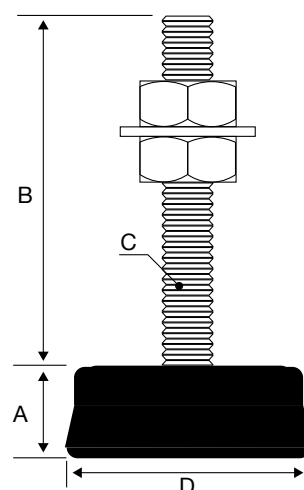


Application

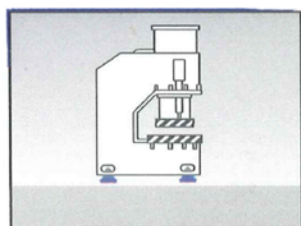


Machines & tools



Plastic & rubber injectors

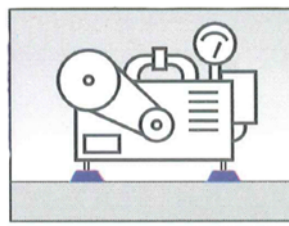

Motors & Pump

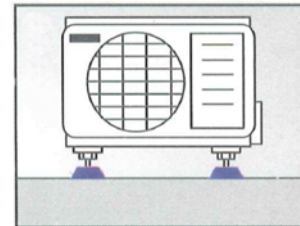

Air conditioning