


General description


The **kit square foot** is designed to support metallic structures (H-frames) on roofs or in industrial spaces. Suitable for 41 x 41 mm slotted channel rails.

- Preserves the waterproofing membrane of the roof
- Easy and fast installation
- Closed cell polyethylene anti-vibration pads pre-attached
- Great flexibility: adjustable height / weight

SQUARE FOOT: B-SQF



B-SQF-200



B-SQF-305



B-SQF-500


The square foot includes :

- High Density Polyethylene (HDPE) foot
- Pre-attached insulating mats

H FRAME KIT: B-KSF



B-KSF-200

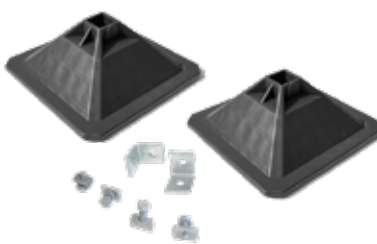

B-KSF-305



B-KSF-500

The H frame kit includes :

- Square foot : x2
- M10 brackets : x2
- M10 fixings : x4

Technical specification

	B-SQF-200	B-SQF-305	B-SQF-500
Material	High Density polyethylene (HDPE)		
Dimensions	200 x 200 x 120 mm	305 x 305 x 120 mm	500 x 500 x 120 mm
Maximum load per set of 2 feet	150 Kg*	350 Kg*	500 Kg*
Recommended temperature	-30°C / +110°C		

* The support rails not being supplied by us, loads are given for information.
Please refer to the technical data of rails to know the maximum load.

Application

Designed to support ventilation ducts, cables trays, pipes.

