



General description

- Exhaust steel air valve
- Adjustable inner core
- 50 mm deep galvanized steel mounting frame
- Standard available colour : White RAL9010 (Matt) and RAL 9016 (Shiny) and black 9005 with 30% gloss
- Available diameters : 80-250 mm

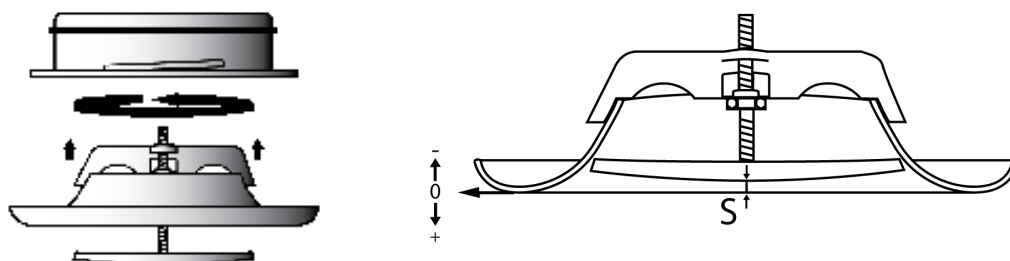

Technical specification

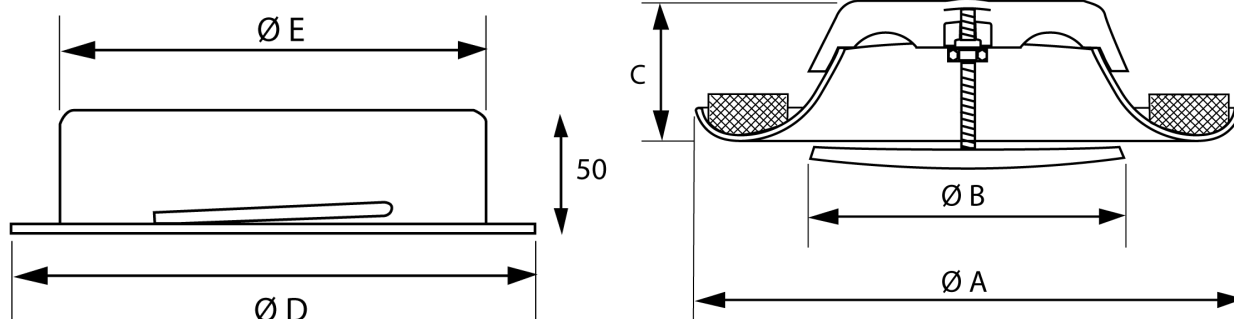

	E-SVF 9010	E-SVF 9016	E-BLACK-SVF 9005	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
80	✓	✓		116	80	38	105	79
100	✓	✓	✓	140	93	38	125	99
125	✓	✓	✓	166	112	45	150	124
150	✓	✓	✓	203	137	50	175	149
160	✓	✓	✓	210	148	50	186	159
200	✓	✓	✓	250	195	56	225	199
250	✓	✓		305	215	75	275	248

Tolerance : +/- 3 mm except Dia E: Tolerance: +/- 1 mm

Sound attenuation and airflow characteristics

according to «S» opening

Diameters	Airflow (m ³ /h)	Airflow (l/s)	Opening «S» (mm)	Delta Pt (Pa)	dBA
DIA 80 MM	40	11	3	35	22
			0	80	31
	60	17	9	40	30
			6	55	32
			3	100	38
DIA 100 MM	80	22.2	8	35	25
			6	55	30
			4	85	34
	100	27.8	10	58	33
			8	72	36
	120	33.3	10	68	36
DIA 125 MM	100	27.8	6	35	23
			3	50	26
			0	90	34
	140	39	15	28	25
			12	34	27
			9	45	28
			6	65	33
			3	100	36
	180	50	15	45	32
			12	50	33
			9	70	35
DIA 150/160 MM	160	41	10	25	20
			5	42	23
			2	70	30
			0	90	35
	200	56	10	40	24
			5	68	30
			2	95	35
	250	69	15	38	26
			10	59	30
			5	95	36
DIA 200 MM	300	83	20	25	25
			15	35	27
			12	50	30
			9	68	32
			6	100	35
	350	97	20	35	30
			15	55	33
			12	70	35
	400	111	20	50	34
			15	65	36