

### General description

The **Cylindrical Rubber Mounts CG** consist of rubber-metal vibration absorbers, especially indicated for elastic support of airconditioning units and small machines. They protect the environment against the transmission of vibrations, impacts and structural noise.

They are one of the most highly evolved series of rubber vibration absorbers, being one of the most complete, safest and offering the best behaviour and stability.

They are supplied individually or in packs of 4 pieces.


Pack consists of : 4 rubber mounts, 8 nuts and 8 washers.



### Technical specification


- Manufactured in NR (Natural Rubber) 55°Sh A.
- Other hardness available on request
- Natural frequency : 16-14 Hz
- Other models on request

Description	A (mm)	B (mm)	C (mm)	E (mm)	Deflexion (mm)	Load (Kg)
MMCG 20-20	20	20	M6	20	5	30
MMCG 25-25	25	25	M8	20	6	50
MMCG 25-30	25	30	M8	20	8	50
MMCG 30-30	30	30	M8	20	8	60
MMCG 30-40	30	40	M8	20	9	60
MMCG 40-28	40	28	M8	20	6	120
MMCG 40-40	40	40	M8	25	10	150
MFCG 30-40	30	40	M8	20	9	60
MFCG 40-28	40	28	M8	25	6	120
FFCG 25-25	25	25	M8	20	6	50
FFCG 30-30	30	30	M8	20	7	80
FFCG 60-55	60	55	M10	25	12	200
FFCG 70-60	70	60	M10	25	12	300

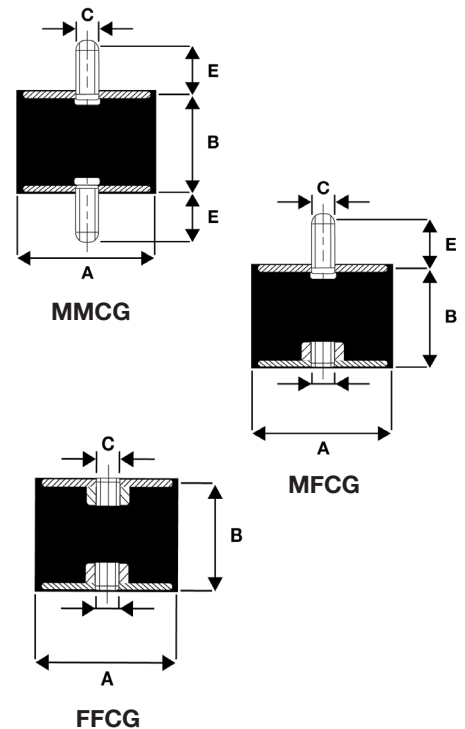

### Assembly & application

- Attach the support to the wall
- Fasten the vibration absorbers to the support
- Mount the unit onto the vibration absorbers
- Attach the vibration absorbers onto the holes in the unit



Exterior air conditioning units



Motors and pumps

Information contained herein is based on careful tests and experience. It reflects our knowledge and is for guidance purpose only. It is given in good faith and user should ensure that the product is fit for purpose before any application. The quoted values are average and should not be taken as maximum or minimum values for specific purposes. Manufacturer and distributor are not responsible for any non-recommended use or consequential damage.